

tina givens™

TGP-A3124

# Zelda slip with BLOOMERS

STYLISH COMFORT  
WWW.SEWFINAGIVENS.COM

## FABRIC REQUIREMENTS

Slip .. 54" wide fabric only  
2-3/4Yds or 2.5Meters

Pants... .. 44" w  
XS,S,M..... 2.25Y or 2.05M  
L,XL,2X,3X... 2.75Y or 2.5M

ALL SIZES 54"W  
2.25Y OR 2.05M  
+ 1" wide elastic

LIGHT TO MEDIUM WEIGHT LINEN OR COTTON. RECOMMEND SOMETHING SOFT AND LIGHT FOR THE SLIP, CAN USE A COTTON FOR PANTS. LINEN IS PERFECT. OR SILK, RAYON, VELVET FOR BOTH.



SIZING  
XS...4-6  
S...8-10  
M... 12-14  
L...16-18  
XL ... 20-22  
2X...24

PANTS -  
TO FIT HIP  
MEASUREMENT  
AS FOLLOWS:  
XS...HIPS...36"  
S ... 37-38"  
M... 39-40"  
L... 41.5-43"  
XL... 44.5-45"  
2X... 46-48  
3X... 50"

tina givens™

## Pattern Preparation



**SIMPLY PRINT OUT THIS PDF DOWNLOAD PATTERN ON LETTER SIZE PAPER (8.5X11 IN US OR EURO SIZE)**

Tape all the join lines together. It's that simple.

For more info see instructions online at [www.sewfinagivens.com](http://www.sewfinagivens.com)

**ONCE ALL TAPED TOGETHER SELECT THE SIZE YOU WISH TO MAKE, SEE OUR SIZE CHART AND CUT OUT YOUR PAPER PATTERN PIECES.**

**TIPS: PRINT OUT IN DRAFT MODE TO SAVE INK, 100% DO NOT SHRINK DOCUMENT, AND MAKE SURE TO MEASURE THE 3" SQUARE TO ENSURE SCALE IS CORRECT.**

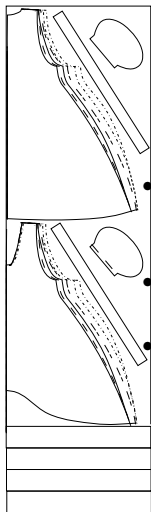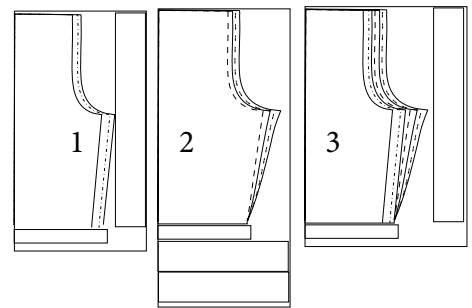

© tina givens

## Cutting Instructions

- SLIP - Refer to the diagram shown at left. Place the slip pattern along the fold of the fabric and cut the back neck and longer hemline; cut the front as shown cutting the front neckline and shorter curved edge.
- Cut the bias strips as shown and 4 pocket pieces. You also need 4 strips cut 4" wide by the width of the fabric (cut off selvages of these strips).
- For the pants, fold the fabric in half lengthwise, then fold widthwise so you have 4 layers of fabric, folds going down left side and across the top. Lay the pant pattern piece down the long fold edge, and for the ruffle, cut the long strip as shown in diagram 1 (for 44" wide for smaller sizes and diagram 3 for 54" wide fabric all sizes.) If using 44" wide for larger sizes, then refer to diagram 2 and cut strips across the fabric as shown, need 2 strips per pant leg.

## Sewing Instructions


NOTE: ALL SEAMS ARE 3/8"  
UNLESS OTHERWISE STATED!

© TG All designs and art © Tina Givens. No part of this product may be reproduced in any form. "All designs, art, photography and images are protected by federal copyright law. Designs are not to be reproduced for commercial sale. All rights are reserved.

- Place the pocket pieces in place on each side of the front and back dress panels, see fig.1. Reference the pattern piece for placement. The pockets should be placed right side to right side of the fabrics, matching raw edges as shown.
- Stitch all pockets in place as shown in fig.1. Press.
- Place the panels together, matching sides, pockets and shoulders, right sides facing. Stitch, pivoting at pocket corners. Stitch shoulder seams. Clip into corners of pockets slightly. press.
- Using the bias binding strips, place one around the neckline, right sides facing. Join the ends at the back center as shown in fig.3. and pin the binding in place. Stitch.

# Sewing Instructions

NOTE: ALL SEAMS ARE 3/8" UNLESS OTHERWISE STATED!

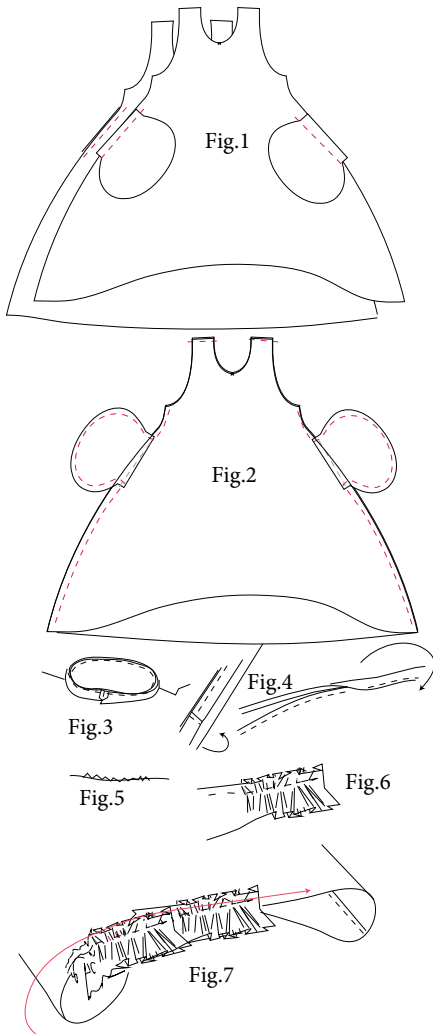

tina givens™

- Press binding seam allowance upward onto the binding strip, press the raw edge of the strip over to it's wrong side 1/4" as in fig.4. Fold the strip over the seam allowance encasing the stitches as in fig.5. and stitch binding down just past the first row of stitches.
- Repeat for the armholes with the binding join at the arm pit. Press.
- Hem the dress by making a small 1/8" rolled hem. Roll 1/8" and again 1/8", press and stitch all the way around the hem.
- Prepare all 4 ruffle strips by first zig-zagging all the way around the 8 pieces along the edge as in fig.5.
- Using gather stitch or hand ruffle/pleat all strips to just over half their width. The pleat/gather line should be 1/2" from the top edge. Fig.6.
- Begin by placing the ruffled strips along the hemline 1" above the hem edge, see fig.7.
- Place these on the right side of the fabric as shown. Overlap all 4 about 1-2" and continue around the hemline. Stitch along the gather/pleat stitch line -- through all layers.
- If you have made your Zelda Slip in linen, launder on a gentle cycle and dry in cool to warm dryer - trim off excess threads.

- Zelda Bloomers
- Place both pant legs, right sides facing matching side edges, see fig.8. Stitch along both curved edges. Press.
- Place the crotch seams together and match the inner leg seam. See fig.9 and stitch. Press.
- Refer to the pattern piece for the vertical pleat lines according to size of pant. Mark these lines on your pant legs (there should be 4 lines per pant leg).
- Make three 1.5" pleats going upward see fig.3. Pleats are horizontal across the vertical lines. Stitch upward along that line to secure the pleats. Make sure you end at the top of the top pleat, reverse your stitches to maintain a strong hold.
- Press both the binding strips, and the ruffle strips in half lengthwise, right sides facing outward. Press flat. Fig.11. Tuck in the side short edges and press again.
- Ruffle or make pleats along the raw edge of the 'ruffle' strips as in fig.12. Pleat or gather them up so they measure approximately one circle around the pant hem and overlap 1" at inner leg.
- First place the binding strip you pressed -- onto the right side of the pant leg as in fig.13. raw edge to raw edge, right sides facing. Go around the leg, trim off any excess. Tuck in one short edge into the starting point. Baste in place.
- Add the ruffle strips along the hemline, raw edge to raw edge, but the ruffles go on the wrong side of the pant leg. See fig.13. Overlap the ruffles when you meet the beginning.
- Stitch through all layers around the pant legs.
- Press seam allowance (which will be on the right side of the pants) upward, and press the binding upward on the right side of the fabric. See fig.14.
- Stitch the binding down through all layers, see fig.14.
- Fold waist band over 1/4" to wrong side and press. Fold again 1-1/8" and press. Stitch 1/\*' from the very top edge all the way

around the waist. And then stitch down the elastic channel at the fold leaving 2" open to thread the elastic through. Thread elastic through, join ends and close up the opening.

